

FORM PTO-1390
(REV 10-2000)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

T2146-906738

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)

09/719193

INTERNATIONAL APPLICATION NO.

PCT/FR00/00902

INTERNATIONAL FILING DATE

7 April 2000

PRIORITY DATE CLAIMED

9 April 1999

TITLE OF INVENTION METHOD FOR MAKING SECURE ONE OR SEVERAL COMPUTER INSTALLATIONS
USING A COMMON CRYPTOGRAPHIC SECRET ALGORITHM, USE OF THE METHOD


APPLICANT(S) FOR DO/EO/US

Louis GOUBIN & Jacques PATARIN

AND COMPUTER INSTALLATION

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to promptly begin national examination procedures (35 U.S.C. 371(f)).
4. ☒ The US has been elected by the expiration of 19 months from the priority date (PCT Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☐ is attached hereto (required only if not communicated by the International Bureau).
 - b. ☒ has been communicated by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ have been communicated by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).



Items 11 to 16 below concern document(s) or information included:

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98. and copies of cited references
12. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
to BULL CP8
13. ☒ A FIRST preliminary amendment.
☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification.
15. ☒ A change of power of attorney and/or address letter.
16. ☒ Other items or information:
VERIFICATION OF TRANSLATION
PROPOSED DRAWING CORRECTIONS
CYS OF PCT FORMS: Demande; PCT/RO/101; PCT/IB/301; PCT/IB/308

Verification of Translation

I, Robin Holding, having an office at 948 15th Street, #4, Santa Monica, CA 90403-3134, hereby state that I am well acquainted with both the English and French languages and that to the best of my knowledge and ability, the appended document is a true and faithful translation of

Int'l. Patent Application No. PCT/FR00/00902

Filed on 7 April 2000

In the name of Louis GOUBIN et al.

I further declare that the above statement is true; and further, that this statement is made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent resulting therefrom.

December 1, 2000

Date

Robin Holding
Robin Holding

09/719193

528 Rec'd PCT/PTO 08 DEC 2000

IN THE UNITED STATES DESIGNATED/ELECTED OFFICE (D.O./E.O./US)

Applicant: Louis GOUBIN et al.

International
Application No.: PCT/FR00/00902International
Filing Date: 7 April 2000

U.S. Serial No.: To be Assigned

U.S. Filing Date: December 8 2000

For: **METHOD FOR MAKING SECURE ONE OR SEVERAL
COMPUTER INSTALLATIONS USING A COMMON
CRYPTOGRAPHIC SECRET KEY ALGORITHM, USE OF
THE METHOD AND COMPUTER INSTALLATION**

McLean, Virginia

PRELIMINARY AMENDMENTHonorable Commissioner of Patents
and Trademarks
Washington, D.C. 20231

Sir:

Please amend the subject application, filed concurrently herewith, as
indicated below:**IN THE TITLE:**

Delete the title in its entirety and substitute the following new title:

--METHOD FOR MAKING SECURE ONE OR SEVERAL COMPUTER
INSTALLATIONS USING A COMMON SECRET KEY ALGORITHM, USE OF THE
METHOD AND A COMPUTER SYSTEM UTILIZING THE METHOD--**IN THE SPECIFICATION:**

After the title and before the first paragraph on page 1, insert the following heading at the left-hand margin:

--FIELD OF THE INVENTION--;

Page 1, line 7, insert a paragraph indentation before the sentence beginning "More precisely,..." and insert the following heading at the left-hand margin:

--BACKGROUND OF THE INVENTION--;

Page 1, line 21, delete "We are" and substitute --The invention herein is--;

Page 1, line 22, before "algorithms", insert --cryptographic--;

Page 1, at line 26, before the paragraph beginning "Attacks,...", insert the following heading at the left hand margin:

--DESCRIPTION OF RELATED ART--;

Page 1, line 30, before "incorporated", insert --the subject matter of which is hereby--;

Page 2, line 7, delete "we will consider";

Page 2, line 8, after "algorithm", delete ", a description of which", and substitute --will be considered. A description--;

Page 9, line 17, in the second equation, delete "to" and substitute --into--;

Page 9, line 18, in the equation, delete "to" and substitute --into--;

Page 12, at line 5, and before the paragraph beginning "One of the objects of the ..." insert the following paragraph at the left-hand margin:

--SUMMARY OF THE INVENTION--;

Page 15, at line 26 and before the paragraph beginning "Other characteristics and advantages ...", insert the following heading at the left hand margin:

--BRIEF DESCRIPTION OF THE DRAWINGS--;

Page 16, at line 14 and before the paragraph beginning "The invention...", insert the following heading at the left hand margin:

--DESCRIPTION OF THE PREFERRED EMBODIMENT(S)--;

Page 20, after line 18, insert the following new paragraph:

--While this invention has been described in conjunction with specific embodiments thereof, it is evident that many alternatives, modifications and variations will be apparent to those skilled in the art. Accordingly, the preferred embodiments of the invention as set forth herein, are intended to be illustrative, not limiting. Various changes may be made without departing from the true spirit and full scope of the invention as set forth herein and defined in the claims.—

IN THE CLAIMS:

Please cancel claims 1 – 26 in their entirety and without prejudice and substitute the following new claims:

1 --27. A method for protecting one or more computer systems using the
2 same secret key (Ks) cryptographic algorithm, characterized in that secret data (Ds)
3 stored in a secret area of the computer system or systems is utilized to perform a
4 cryptographic calculation for each computer system and for each secret key.

1 28. The method according to claim 27, characterized in that, for each
2 computer system and for each secret key (Ks), the way in which said secret data
3 (Ds) is used to perform said cryptographic calculation is public.

1 29. The method according to claim 27, characterized in that in each of the
2 computer systems, each secret key (Ks) used by said cryptographic calculation
3 corresponds to a specific piece of said secret data (Ds).

1 30. A method according to claim 27 for protecting one or more computer
2 systems wherein the cryptographic calculation uses nonlinear transformations of km
3 bits into kn bits described by k conversion tables in which n output bits of the
4 transformation are read at an address that is a function of the km input bits, and for
5 each of said nonlinear transformations, said k tables are part of the secret data (Ds).

1 31. A method according to claim 27 for protecting one or more computer
2 systems wherein the cryptographic calculation process uses nonlinear
3 transformations of km bits into kn bits described by k conversion tables in which n
4 output bits of the transformation are read at an address obtained by applying a
5 secret bijective function (ϕ) to an m-bit value, itself obtained by applying a public
6 function of the km input bits of the nonlinear transformation, and for each of said
7 nonlinear transformations, said k tables are part of the secret data (Ds).

1 32. The method according to claim 27, comprising storing a conversion table
 2 calculation program in each computer system and activating the calculation program
 3 by a given event in order to calculate tables and store all or part of said tables in the
 4 secret data (Ds)..

1 33. A computer system comprising storage means for storing a modified
 2 cryptographic algorithm that adheres to computational phases of a standard
 3 cryptographic algorithm, a secret encryption key contained in a secret area of the
 4 storage means for modifying the standard cryptographic algorithm, means for
 5 executing said modified cryptographic algorithm, first secret means for replacing
 6 intermediate variables required for the computational phases of the standard
 7 algorithm with a plurality (k) of partial intermediate variables, second means for
 8 applying a nonlinear transformation table to each of said partial intermediate
 9 variables, and third secret means for reconstituting a final result corresponding to
 10 utilization of the standard cryptographic algorithm from results obtained on the partial
 11 variables.

1 34. A computer system according to claim 33, characterized in that secret
 2 encryption key stored in the secret area includes at least one first random variable v_1
 3 constituting at least one secret partial variable, and the modified cryptographic
 4 algorithm determines at least one other partial variable v_2 , by applying a first secret
 5 function to the intermediate variable v and the secret partial variable or variables v_1 .

1 35. A computer system according to claim 34, characterized in that the
 2 modified cryptographic algorithm includes tables used for applying the nonlinear
 3 transformations to the partial variables v_1 and v_2 , at least one of said tables (A),
 4 formed by random selection, and being stored in the secret data Ds, the other tables
 5 required for the calculations being stored in a nonvolatile memory, means for
 6 executing various computational rounds of the standard algorithm, each time using
 7 the tables on the partial variables, and means for calculating the result in the last
 8 round of the algorithm by combining the partial variables in accordance with a
 9 second secret function.

1 36. A computer system according to claim 33, characterized in that the first
2 secret means of the modified algorithm are constituted by a function f , linking the
3 partial intermediate variables and each intermediate variable (v) , such that the
4 knowledge of one value of said intermediate variable never makes it possible to
5 deduce all of the particular partial values v_i such that there exists a $(k-1)$ -tuple $(v_1,$
6 $\dots, v_{i-1}, v_{i+1}, \dots, v_k)$ that satisfies the equation $f(v_1, \dots, v_i, \dots, v_k) = v$.

1 37. A computer system according to claim 33, characterized in that the
2 second means of the modified algorithm are constituted by k partial conversion
3 tables, and among the k partial conversion tables, $k-1$ partial conversion tables
4 contain secret random variables.

1 38. A computer system according to claim 37, characterized in that the
2 second means of the modified algorithm comprise k conversion tables, each of said
3 conversion tables receiving an input a value obtained by applying a secret bijective
4 function φ_1 to said function $f(v_1, \dots, v_k)$ of the partial intermediate variables in
5 accordance with the relation $\varphi_j \circ f(v_1, \dots, v_k)$, $j \in [1, k]$, this application $\varphi_j \circ f(v_1, \dots, v_k)$
6 being performed by direct evaluation of a resulting value, this resulting value, applied
7 to the input of the conversion table, making it possible to read n output bits of the
8 transformation at an address that is a function of these m input bits.

1 39. A computer system according to claim 33, characterized in that the
2 second means of the modified algorithm comprise means for replacing each
3 nonlinear transformation applied to an intermediate variable of the standard
4 cryptographic calculation process, without a separation, with a partial nonlinear
5 transformation of km bits into kn bits applied to all of the partial intermediate
6 variables, means for calculating $(k-n)$ of said output bits of this transformation as a
7 polynomial function of the km input bits, and means for reading the remaining n bits
8 of said output bits by reading a conversion table in which the n remaining bits are
9 read at an address that is a function of the km input bits.

1 40. A computer system according to claim 33, characterized in that it

2 further includes means for sequentially executing operations performed by the
3 modified algorithm in the various parts resulting from the separation of the
4 cryptographic calculation process into several distinct calculation process parts.

1 41. A computer system according to claim 33, characterized in that it includes
2 means for executing, in interleaved fashion, operations performed in the various
3 parts resulting from the separation of the cryptographic calculation process into
4 several distinct calculation process parts.

1 42. A computer system according to claim 33, characterized in that it includes
2 means for simultaneously executing operations performed in the various parts
3 resulting from the separation of the cryptographic calculation process into several
4 distinct calculation process parts, in the event of multiprogramming.

1 43. A computer system according to claim 33, characterized in that it includes
2 means for simultaneously executing, in different processors working in parallel, the
3 operations performed in the various parts resulting from the separation of the
4 cryptographic calculation process into several distinct calculation process parts.

1 44. A computer system according to claim 33, characterized in that it includes
2 a conversion table calculation program stored in each computer system and means
3 for activation by a given event of the calculation of the tables and for the storage of
4 all or part of these tables in the secret data.

1 45. A computer system according to claim 33, further including a counter
2 having means for storing a value that is incremented with each cryptographic
3 calculation so as to constitute a given event for the activation, by activating means,
4 of the calculation of the tables when a given value is exceeded.--

IN THE ABSTRACT:

Please delete line 7 "Fig. 1" from the Abstract

REMARKS

This Preliminary Amendment is filed to insert headings to conform the application to U.S. practice, and to correct informalities in the specification, claims and abstract resulting from a literal translation of the French text.


Early action on the merits is earnestly solicited.

Respectfully submitted,

MILES & STOCKBRIDGE P.C.

Date: December 8, 2000

By:


Edward J. Kondracki
Registration No. 20,604

1751 Pinnacle Drive – Suite 500
McLean, VA 22102-3833
Tel.: 703/903-9000
Fax: 703/610-8686

**METHOD FOR MAKING SECURE ONE OR SEVERAL COMPUTER
INSTALLATIONS USING A COMMON CRYPTOGRAPHIC SECRET KEY
ALGORITHM, USE OF THE METHOD AND COMPUTER INSTALLATION**

5 The present invention relates to a method for protecting one or more computer systems using the same secret key cryptographic algorithm, a utilization of the method and the computer system. More precisely, the purpose of the method is to make the way in which a calculation is performed dependent on secret data, which data can be different depending on the computer system involved or the secret key used. The objective is to enable computer
10 systems not to be vulnerable to a certain type of physical attack known as "Differential Key Differential Power Analysis," abbreviated DKDPA, which seeks to obtain information on a secret key by studying the electric power consumption of the computer system or systems during several executions of the calculation performed with different secret keys, at least one of which is known by the attacker (for example if he has been able, for at least one of these
15 calculations, to set the secret key himself).

The cryptographic algorithms considered herein use a secret key to calculate a piece of output information from a piece of input information; this can involve an encryption, decryption, signature, signature verification, authentication or non-repudiation operation. They are constructed so that an attacker who knows the inputs and the outputs cannot in
20 practice deduce any information on the secret key itself.

We are therefore interested in a broader class than the one traditionally designated by the expression secret key algorithms, or symmetric algorithms. In particular, all of what is described in the present patent application also applies to so-called public key or asymmetric algorithms, which actually include two keys, one public, the other secret, the latter being the
25 one sought by the attacks described below.

Attacks of the Power Analysis type, developed by Paul Kocher and Cryptographic Research (see the document "Introduction to Differential Power Analysis and Related Attacks" by Paul Kocher, Joshua Jaffe, and Benjamin Jun, Cryptography Research, 870 Market St., Suite 1008, San Francisco, CA 94102, a publication of the HTML document
30 found at the URL address:

<http://www.cryptography.com/dpa/technical/index.html>,
incorporated into the present application as a reference), start with the assumption that in reality, the attacker can acquire information other than just the input and output data during

the execution of the calculation, such as for example the electric power consumption of the microcontroller or the electromagnetic radiation emitted by the circuit.

Differential Power Analysis, abbreviated DPA, is an attack that makes it possible to obtain information on the secret key contained in the computer system by performing a statistical analysis of the power consumption measurements performed on a large number of calculations with this same key.

As a non-limiting example, we will consider the case of the DES (Data Encryption Standard) algorithm, a description of which can be found in any of the following documents:

FIPS PUB 46-2, Data Encryption Standard, 1994;

FIPS PUB 74, Guidelines for Implementing and Using the NBS Data Encryption Standard, 1981;

ANSI X3.92, American National Standard, Data Encryption Algorithm, 1981;

ISO/IEC 8731:1987, Banking-Approved Algorithms for Message Authentication – Part 1: Data Encryption Algorithm (DEA),

or in the following book:

Bruce, Schneier, Applied Cryptography, 2nd Edition, John Wiley & Sons, 1996, page 270.

The above-mentioned documents are incorporated into the present application as references.

The DES algorithm is implemented in 16 steps called rounds, represented in Fig. 2A. In each of the 16 rounds, a transformation F is performed on 32 bits (R_1), which in the first round constitute half (R_0) of the input message (E). In each of the rounds, a part (R_i) formed of 32 bits of the information to be encrypted is combined in the function F with a part (K_i) formed of 32 bits of the secret encryption key (K_s). This function F performs, in each round, eight nonlinear transformations of 6 bits into 4 bits, noted (Figs. 1b, 2b) S_1, S_2, \dots, S_8 , that are encoded, each stored in an encoding table called an S-box. These eight S-boxes are identical for all cards or for all computer systems. Only the encryption key changes from one card to another or from one computer system to another. Each S-box is a table with 64 (2^6) rows of four 1-bit columns. Quite clearly, these tables can be arranged differently in memory in order to save space.

From the construction of the DES algorithm, we see in Fig. 2B that the transformations performed by the function F on the 32 bits of information constituting (R_i) can always fall into one of the following categories:

- a permutation of the bits of R_i ; followed by an expansion of R_i to 48 bits, in order to obtain the information R_i' ;

- an exclusive-OR of R_i' with a variable K_i depending solely on the key or a subkey, in order to obtain a 48-bit result R_i'' ;

5 - a nonlinear transformation of R_i'' by applying a different S-box to each 6-bit portion constituting R_i'' ;

- a permutation called P (this permutation is defined and imposed by the DES standard) on the 32 bits output from the set constituted by the eight S-boxes (S_1 through S_8).

10 The result obtained by applying the function F is combined in an exclusive-OR either with the other 32 bits of the message, or with the 32 bits of the result supplied in step i-2, in order to satisfy the relation $R_i = R_{i-2} \oplus F(R_{i-1}, K_i)$, Fig. 2A.

The DPA type attack on the DES can be performed on the DES in the following way:

15 1st step: Power consumption measurements are made on the first round, for 1,000 DES calculations. The input values of these 1,000 calculations are notated $E[1], \dots, E[1,000]$. The corresponding 1,000 power consumption curves measured during these calculations are notated $C[1], \dots, C[1,000]$. The average curve CM of the 1,000 consumption curves is also calculated.

20 2nd step: For example, let us consider the first output bit of the first S-box during the first round. Let b be the value of this bit. It is easy to see that b depends only on the 6 bits of the secret key. The attacker forms a hypothesis on the 6 bits in question. He calculates, from each of these 6 bits and the $E[i]$, the expected theoretical values for b. This makes it possible to separate the 1,000 inputs $E[1], \dots, E[1,000]$ into two categories: those that yield $b=0$ and those that yield $b=1$.

25 3rd step: Next the average CM' of the curves corresponding to inputs in the first category, i.e. for which $b=0$, is calculated. If CM and CM' have a notable difference, the values retained for the 6 key bits are considered to be the correct ones. If CM and CM' do not have any appreciable difference in the statistical sense, i.e., no difference that is substantially greater than the standard deviation of the noise measured, the 2nd step is repeated with another choice for the 6 bits.

30 4th step: Steps 2 and 3 are repeated with a target bit b output from the second S-box, then from the third S-box, and so on through the eighth S-box. Thus, the 48 bits of the secret key are eventually obtained.

5th step: The 8 remaining bits can be found through an exhaustive search.

This attack does not require any knowledge on the individual power consumption of each instruction, or on the time position of each of these instructions. It applies in the same way if we assume that the attacker knows some outputs of the algorithm and the corresponding consumption curves. It is based solely on the fundamental hypothesis

according to which:

Fundamental hypothesis: there exists an intermediate variable, appearing during the calculation of the algorithm, such that the knowledge of several key bits, in practice less than 32 bits, makes it possible to decide whether or not two inputs, or respectively two outputs, yield the same value for this variable.

All the algorithms that use S-boxes, such as DES, are potentially vulnerable to DPA, since the usual embodiments generally fall within the category of the hypothesis mentioned above.

The attacks known as High-Order Differential Power Analysis, abbreviated HO-DPA, are a generalization of the DPA attack described above. They can use several different sources of information; in addition to power consumption, they can perform measurements of electromagnetic radiation, temperature, etc., and implement statistical operations that are more sophisticated than the simple notion of averaging, and intermediate variables (generalizing the bit b defined above) that are less elementary. Nevertheless, they are based on exactly the same fundamental hypothesis as DPA.

One solution for eliminating the risk of DPA or HO-DPA attacks consists, for a cryptographic calculation process using a secret key K_s , of modifying the implementation of the algorithm so that the aforementioned fundamental hypotheses is no longer verified, since there is no longer any calculated intermediate variable that depends on the knowledge of an easily accessible subset of the secret key.

To this end, the cryptographic calculation process is first separated in the computer system into several distinct calculation process parts PPC_1 through PPC_k (Fig. 3) performed simultaneously, then secondly, the final value V corresponding to that obtained by the cryptographic calculation without a separation is reconstituted in the computer system from the partial intermediate results v_1 through v_k obtained by implementing the aforementioned distinct calculation process parts PPC_1 through PPC_k .

This separation is performed by the modified calculation algorithm, which replaces each intermediate variable v occurring during the calculation and depending on the input (or output) data with k variables v_1, v_2, \dots, v_k , such that v_1, v_2, \dots, v_k make it possible, as

necessary, to reconstitute v . More precisely, this means that there exists a function f that makes it possible to determine v , such that $v=f(v_1, v_2, \dots, v_k)$ and such that the separation performed by the modified algorithm satisfies this function. It is also assumed that f preferably satisfies the following first condition:

5 Condition No. 1: Let i be a subscript (in the broad sense) between 1 and k . The knowledge of a value v never makes it possible, in practice, to deduce information on all of the values v_i such that there exists a $(k-1)$ -tuple $(v_1, \dots, v_{i-1}, v_{i+1}, \dots, v_k)$ that satisfies the equation $f(v_1, \dots, v_k)=v$.

10 The algorithm is then "translated" by replacing each intermediate variable V depending on input (or output) data with the k variables v_1, v_2, \dots, v_k .

 In order to guarantee the maximum security of the modified algorithm in its new form, the following additional condition (Condition No. 2) is imposed on the function f :

15 Condition No. 2: The function f is such that the transformations to be performed on v_1, v_2, \dots , or v_k during the calculation in place of the transformations normally performed on v , can be implemented without having to recalculate v .

20 Let us return to the example of the DES algorithm. A concrete implementation of the method described above consists of constructing the modified calculation algorithm DES_M so that it separates each intermediate variable v occurring during the calculation and depending on input or output data into, for example, two variables v_1 and v_2 , which means that we take $k=2$. Let us consider the function $f(v_1, v_2)=v=v_1 \oplus v_2$ in the above example No. 1, which satisfies Condition No. 1 by construction. From the construction of the DES algorithm, it is easy to see that the transformations it performs on v can always fall into one of the following five categories:

- 25 - a permutation of the bits of v ;
- an expansion of the bits of v ;
- an exclusive-OR of v with another variable v' of the same type;
- an exclusive-OR of v with a variable c that depends only on the key or on a subkey;
- a nonlinear transformation of v by an S-box.

30 The first two categories correspond to linear transformations on the bits of the variable v . For these categories, Condition No. 2 is very easy to verify, and it is sufficient to perform, in place of the transformation normally performed on v , the permutation or expansion on v_1 , then on v_2 , and the relation $f(v_1, v_2) = v$ that was true before the transformation remains equally true afterwards.

Likewise, in the third case, it is sufficient to replace the calculation $v'' = v \oplus v'$ with $v''_1 = v_1 \oplus v'_1$ and $v''_2 = v_2 \oplus v'_2$. The relations $f(v_1, v_2) = v$ and $f(v'_1, v'_2) = v'$ yield $f(v''_1, v''_2) = v''$ and Condition No. 2 is again verified.

In the exclusive-OR of v with a variable c that is dependent only on the key or a subkey, Condition No. 2 is also very easy to satisfy: it is sufficient to replace the calculation of $v \oplus c$ with $v_1 \oplus c$, or $v_2 \oplus c$, which fulfills Condition No. 2.

Finally, in place of the given nonlinear transformation of the prior art $v'=S(v)$, represented in Fig. 4A and embodied in the form of an S-box which, in this example, accepts 6-bit inputs and yields 4-bit outputs, the computer system performs the transformation $(v'_1, v'_2)=S'(v_1, v_2)$ in a variant of embodiment by means of two new S-boxes, each of which can be in the form of a table, this time from 12 bits to 4 bits. In order to guarantee the equality $f(v'_1, v'_2)=v'$, it is sufficient to choose:

$$(v'_1, v'_2) = S'(v_1, v_2) = (A(v_1, v_2), S(v_1 \oplus v_2) \oplus A(v_1, v_2))$$

i.e. $v'_1 = A(v_1, v_2)$ and $v'_2 = S(v_1 \oplus v_2) \oplus A(v_1, v_2)$

where A designates a secret, random transformation of 12 bits into 4 bits. The first (new) S-box (S'_1 , Fig. 4b) corresponds to the table of the transformation $(v_1, v_2) \rightarrow A(v_1, v_2)$, which associates (v_1, v_2) with $A(v_1, v_2)$, and the second (new) S-box (S'_2) corresponds to the table of the transformation $(v_1, v_2) \rightarrow S(v_1 \oplus v_2) \oplus A(v_1, v_2)$ which associates (v_1, v_2) with $S(v_1 \oplus v_2) \oplus A(v_1, v_2)$. The presence of the random function A makes it possible to guarantee Condition No. 1. The use of tables also makes it possible to avoid having to calculate $v_1 \oplus v_2$, thereby making it possible to satisfy Condition No. 2.

The transformation or conversion tables can be stored in a ROM of the microcomputer card when the computer system is constituted by a microcomputer card.

Thus, for a computational step of the nonlinear transformation type implemented by a standard cryptographic calculation process like DES, the separation, as represented in Fig. 4C, can be into k parts. As compared to a standard cryptographic calculation process using nonlinear transformations of m bits into n bits, described by conversion tables in which the n output bits of the transformation are read at an address that is a function of the m input bits, the modified cryptographic calculation algorithm DES_M replaces each nonlinear transformation of m bits into n bits of the standard cryptographic calculation process applied to an intermediate m -bit variable playing the role of an input variable E , without a separation, with a plurality k of partial nonlinear transformations of km bits into n bits, each applied to a partial intermediate variable of

the set k of partial intermediate m -bit variables v_1 through v_k . According to a particularly remarkable aspect of the method that is the subject of the invention, this partial nonlinear transformation is described and embodied by k partial conversion tables in which each of the n output bits of each table constitutes, respectively, the variable v'_1 , the variable v'_2 , ..., the variable v'_k of the transformation, and is read at an address that is a function of one of the k groups of km input bits.

In the above example of DES and in relation to Fig. 4C, it is noted that $k=2$, $n=4$ and $m=6$.

In a first variant, in order to save space in the ROM, it is entirely possible to use the same random function A for each of the eight S-boxes of the conventional description of DES, which makes it possible to have only nine new S-boxes to store instead of sixteen.

A second variant, called Variant No. 2, will be described in connection with Fig. 4D.

In order to reduce the size of the ROM required to store the S-boxes, it is also possible, in place of each nonlinear transformation $v'=S(v)$ of the initial implementation expressed in the form of an S-box (which in the example of DES accepts 6-bit inputs and yields 4-bit outputs), to use the following method, which in this second variant performs the transformation $(v'_1, v'_2)=S'(v_1, v_2)$ by means of two S-boxes (S'_1 ; S'_2), each containing a table of 6 bits into 4 bits. The initial implementation of the calculation of $v'=S(v)$ is replaced in the modified algorithm by the following two successive calculations:

$$v_0 = \varphi(v_1 \oplus v_2)$$

which uses a secret, bijective function of 6 bits into 6 bits, and

$$(v'_1, v'_2) = S'(v_1, v_2) = (A(v_0), S(\varphi^{-1}(v_0)) \oplus A(v_0))$$

$$\text{i.e. } v'_1 = A(v_0), \quad v'_2 = S(\varphi^{-1}(v_0)) \oplus A(v_0)$$

where A designates a secret, random transformation of 6 bits into 4 bits. The first (new) S-

box (referenced S'_1 in Fig. 4D) corresponds to the table of the transformation $v_0 \rightarrow A(v_0)$ which associates v_0 with $A(v_0)$, and the second (new) S-box (referenced S'_2 in Fig. 4D) corresponds to the table of the transformation $v_0 \rightarrow S(\varphi^{-1}(v_0)) \oplus A(v_0)$, which associates v_0 with $S(\varphi^{-1}(v_0)) \oplus A(v_0)$. By construction, we still have the equality $f(v'_1, v'_2) = v'$. The presence of the random function A makes it possible to guarantee Condition No. 1. The use of tables makes it possible to avoid having to calculate $\varphi^{-1}(v_0) = v_1 \oplus v_2$.

Fig. 4E represents a corresponding computational step of the nonlinear transformation type implemented within the framework of the standard cryptographic calculation process, such as DES, as modified in accordance with the method that is the subject of the invention

according to Variant No. 2. In addition to the separation into k parts applied to the input variable E for the nonlinear transformations of m bits into n bits, described by conversion tables in which the n output bits are read at an address that is a function of the m input bits, the cryptographic calculation process is modified by replacing each nonlinear transformation of m bits into n bits, applied to an intermediate m -bit variable playing the role of an input variable E in the standard calculation process, with a partial nonlinear transformation of km bits into kn bits applied to the set k of partial intermediate m -bit variables v_1 through v_k . This partial nonlinear transformation is described and embodied by k conversion tables of km bits into kn bits, each of the inputs of the conversion tables receiving a value obtained by applying a secret bijective function φ_j to the function $f(v_1, \dots, v_k)$ of the partial intermediate variables in accordance with the relation $\varphi_j \circ f(v_1, \dots, v_k)$, with $j \in [1, k]$. The aforementioned application $\varphi_j \circ f(v_1, \dots, v_k)$ is performed by direct evaluation of a resulting value which, applied to the input of the corresponding conversion table 1 through k , makes it possible to read n output bits of the transformation v'_1 or v'_2 or $\dots v'_k$ at an address that is a function of these m input bits.

As in the first example above, and in connection with Fig. 4E, it is noted that for Variant No. 2, $k=2$, $m=6$ and $n=4$.

Moreover, in a simplified version, the bijective functions φ_1 through φ_k are identical.

In order for Condition No. 2 to be satisfied, it is necessary to choose the bijective transformation φ or bijective functions φ_1 through φ_k such that the calculation of $v_0 = \varphi(v_1 \oplus v_2)$ can be done without having to recalculate $v_1 \oplus v_2$. Two examples of choices for the function φ are given below:

Example 1: A linear bijection φ

A secret, linear bijective function of 6 bits into 6 bits is chosen for φ . Within the framework of such a choice, all of the 6-bit values are considered as a vectorial space of dimension 6 in the finite body F_2 with two elements. In practice, choosing φ amounts to choosing a random invertible 6×6 matrix whose coefficients equal 0 or 1. With this choice of φ , it is easy to see that Condition No. 2 is satisfied. In essence, to calculate $\varphi(v_1 \oplus v_2)$, it is sufficient to calculate $\varphi(v_1)$, then $\varphi(v_2)$, and finally to calculate the "exclusive-OR" of the two results obtained.

For example, the matrix $\begin{pmatrix} 1 & 1 & 0 & 1 & 0 & 0 \\ 1 & 1 & 0 & 1 & 0 & 1 \\ 0 & 1 & 1 & 0 & 1 & 0 \\ 1 & 1 & 1 & 0 & 1 & 0 \\ 0 & 1 & 1 & 1 & 1 & 0 \\ 0 & 0 & 1 & 1 & 0 & 1 \end{pmatrix}$ is invertible. It corresponds to the

linear bijection of 6 bits into 6 bits defined by:

- $\varphi(u_1, u_2, u_3, u_4, u_5, u_6) = (u_1 \oplus u_2 \oplus u_4, u_1 \oplus u_2 \oplus u_4 \oplus u_6, u_2 \oplus u_3 \oplus u_5, u_1 \oplus u_2 \oplus u_3 \oplus u_5, u_2 \oplus u_3 \oplus u_4 \oplus u_5, u_3 \oplus u_4 \oplus u_6)$

5 If we take $v_1 = (v_{1,1}, v_{1,2}, v_{1,3}, v_{1,4}, v_{1,5}, v_{1,6})$ and $v_2 = (v_{2,1}, v_{2,2}, v_{2,3}, v_{2,4}, v_{2,5}, v_{2,6})$, then in order to calculate $\varphi(v_1 \oplus v_2)$, we successively calculate:

- $\varphi(v_1) = (v_{1,1} \oplus v_{1,2} \oplus v_{1,4}, v_{1,1} \oplus v_{1,2} \oplus v_{1,4} \oplus v_{1,6}, v_{1,2} \oplus v_{1,3} \oplus v_{1,5}, v_{1,1} \oplus v_{1,2} \oplus v_{1,3} \oplus v_{1,5}, v_{1,2} \oplus v_{1,3} \oplus v_{1,4} \oplus v_{1,5}, v_{1,3} \oplus v_{1,4} \oplus v_{1,6})$;
- $\varphi(v_2) = (v_{2,1} \oplus v_{2,2} \oplus v_{2,4}, v_{2,1} \oplus v_{2,2} \oplus v_{2,4} \oplus v_{2,6}, v_{2,2} \oplus v_{2,3} \oplus v_{2,5}, v_{2,1} \oplus v_{2,2} \oplus v_{2,3} \oplus v_{2,5}, v_{2,2} \oplus v_{2,3} \oplus v_{2,4} \oplus v_{2,5}, v_{2,3} \oplus v_{2,4} \oplus v_{2,6})$.

Then we calculate the "exclusive-OR" of the two results obtained.

Example 2: a quadratic bijection φ

A secret quadratic bijective function of 6 bits into 6 bits is chosen for φ . The term "quadratic" in this case means that each output value bit of the function φ is expressed by a polynomial function of degree two of the 6 input bits, which are identified with 6 elements of the finite body F_2 . In practice, it is possible to choose the function φ defined by the formula $\varphi(x) = t(s(x)^5)$, where s is a secret linear bijective application of $(F_2)^6$ to L , t is a secret linear bijective application of L to $(F_2)^6$, and L designates an algebraic extension of degree 6 of the finite body F_2 . The bijective characteristic of this function φ results from the fact that $a \cdot a^5$ is a bijection on the extension L (the inverse of which is $b \cdot b^3$). In order to establish that Condition No. 2 is still satisfied, it is sufficient to note that it is possible to write:

$$\varphi(v_1 \oplus v_2) = \psi(v_1, v_1) \oplus \psi(v_1, v_2) \oplus \psi(v_2, v_1) \oplus \psi(v_2, v_2)$$

where the function $\psi(x, y) = t(s(x)^4 \cdot s(y))$.

For example, if we identify L with $F_2[X]/(X^6 + X + 1)$, and if we take s and t of

respective matrices

$$\begin{pmatrix} 1 & 1 & 0 & 1 & 0 & 0 \\ 1 & 1 & 0 & 1 & 0 & 1 \\ 0 & 1 & 1 & 0 & 1 & 0 \\ 1 & 1 & 1 & 0 & 1 & 0 \\ 0 & 1 & 1 & 1 & 1 & 0 \\ 0 & 0 & 1 & 1 & 0 & 1 \end{pmatrix} \text{ and } \begin{pmatrix} 0 & 1 & 0 & 0 & 1 & 1 \\ 1 & 1 & 0 & 1 & 0 & 0 \\ 1 & 0 & 1 & 0 & 1 & 1 \\ 0 & 1 & 1 & 1 & 0 & 0 \\ 1 & 0 & 1 & 0 & 1 & 0 \\ 0 & 0 & 1 & 0 & 1 & 1 \end{pmatrix}$$

relative to the base $(1, X, X^2, X^3, X^4, X^5)$ of L over F_2 and to the canonic base of $(F_2)^6$ over F_2 , we obtain the following quadratic bijection ϕ of 6 bits into 6 bits:

$$\phi(u_1, u_2, u_3, u_4, u_5, u_6) =$$

$$\begin{aligned} & (u_2u_5 \oplus u_1u_4 \oplus u_4 \oplus u_6 \oplus u_6u_2 \oplus u_4u_6 \oplus u_2 \oplus u_5 \oplus u_3 \oplus u_4u_3, \\ & u_2u_5 \oplus u_5u_1 \oplus u_1u_4 \oplus u_4 \oplus u_6 \oplus u_4u_5 \oplus u_2 \oplus u_3 \oplus u_3u_1, \\ & u_2u_5 \oplus u_5u_1 \oplus u_6u_5 \oplus u_1u_4 \oplus u_3u_5 \oplus u_1 \oplus u_4u_6 \oplus u_6u_3 \oplus u_4u_3 \oplus u_3u_1, \\ & u_1u_4 \oplus u_2u_3 \oplus u_6u_1 \oplus u_4u_6 \oplus u_5 \oplus u_6u_3 \oplus u_4u_3, \\ & u_5u_1 \oplus u_1u_4 \oplus u_6 \oplus u_3u_5 \oplus u_4u_5 \oplus u_1 \oplus u_6u_1 \oplus u_4u_6 \oplus u_3 \oplus u_6u_3 \oplus u_4u_2, \\ & u_4 \oplus u_6 \oplus u_3u_5 \oplus u_1 \oplus u_4u_6 \oplus u_6u_3). \end{aligned}$$

To calculate $\phi(v_1 \oplus v_2)$, we use the function $\psi(x, y) = t(s(x)^4 \cdot s(y))$ of 12 bits into 6 bits, which yields the 6 output bits as a function of the 12 input bits in accordance with the following rules:

$$\psi(x_1, x_2, x_3, x_4, x_5, x_6, y_1, y_2, y_3, y_4, y_5, y_6) =$$

$$\begin{aligned} & (x_3y_5 \oplus x_6y_2 \oplus x_6y_3 \oplus x_6y_4 \oplus x_3y_1 \oplus x_6y_1 \oplus x_1y_3 \oplus x_1y_5 \oplus x_5y_2 \oplus x_5y_5 \oplus x_5y_1 \oplus x_6y_6 \oplus \\ & x_1y_6 \oplus x_1y_2 \oplus x_1y_4 \oplus x_2y_1 \oplus x_2y_2 \oplus x_4y_4 \oplus x_3y_3 \oplus x_3y_6 \oplus x_4y_3 \oplus x_5y_3, \\ & x_4y_5 \oplus x_3y_1 \oplus x_6y_1 \oplus x_2y_5 \oplus x_5y_1 \oplus x_6y_6 \oplus x_1y_6 \oplus x_1y_2 \oplus x_2y_1 \oplus x_2y_2 \oplus x_4y_1 \oplus x_4y_4 \oplus \\ & x_3y_3, \\ & x_6y_2 \oplus x_6y_3 \oplus x_6y_4 \oplus x_6y_5 \oplus x_3y_1 \oplus x_6y_1 \oplus x_2y_5 \oplus x_5y_1 \oplus x_1y_6 \oplus x_1y_1 \oplus x_1y_2 \oplus x_1y_4 \oplus \\ & x_2y_1 \oplus x_2y_4 \oplus x_4y_2 \oplus x_2y_6 \oplus x_3y_4 \oplus x_5y_3, \\ & x_3y_1 \oplus x_6y_2 \oplus x_2y_6 \oplus x_5y_3 \oplus x_5y_4 \oplus x_5y_6 \oplus x_6y_3 \oplus x_2y_3 \oplus x_4y_6 \oplus x_6y_5 \oplus x_1y_3 \oplus x_5y_5 \oplus \\ & x_2y_4 \oplus x_4y_2 \oplus x_4y_5 \oplus x_3y_5 \oplus x_4y_3 \oplus x_6y_1 \oplus x_4y_1, \\ & x_3y_1 \oplus x_6y_6 \oplus x_5y_3 \oplus x_5y_6 \oplus x_5y_2 \oplus x_1y_5 \oplus x_1y_1 \oplus x_1y_2 \oplus x_2y_1 \oplus x_2y_3 \oplus x_3y_6 \oplus x_6y_5 \oplus \\ & x_1y_3 \oplus x_2y_4 \oplus x_3y_3 \oplus x_4y_5 \oplus x_2y_5 \oplus x_6y_1 \oplus x_4y_1 \oplus x_6y_4 \oplus x_3y_2, \\ & x_6y_6 \oplus x_4y_4 \oplus x_5y_4 \oplus x_5y_6 \oplus x_6y_3 \oplus x_1y_6 \oplus x_1y_1 \oplus x_1y_2 \oplus x_2y_1 \oplus x_6y_5 \oplus x_2y_4 \oplus x_4y_2 \oplus \\ & x_4y_5 \oplus x_3y_5 \oplus x_6y_1 \oplus x_6y_4). \end{aligned}$$

Using these formulas, we successively calculate:

- $\psi(v_1, v_1)$;
- $\psi(v_1, v_2)$;
- $\psi(v_2, v_1)$;
- $\psi(v_2, v_2)$.

5 Then we calculate the "exclusive-OR" of the four results obtained.

In a third variant, again in order to reduce the size of the ROM required to store the S-boxes, it is possible to simultaneously apply the ideas of the two preceding variants, Variant No. 1 and Variant No. 2: Variant No. 2 is used with the same secret bijection ϕ (of 6 bits into 6 bits) and the same secret random function A (of 6 bits into 6 bits) in the new
10 implementation of each nonlinear transformation expressed in the form of an S-box.

The disadvantage of the solution described above for warding off DPA attacks is that is vulnerable to a DKDPA attack.

The utilization of the protection method described above makes it possible to render DPA or HO-DPA attacks ineffective. However, the new implementation of the secret key
15 cryptographic algorithm may be vulnerable to another attack, which will hereinafter be called Differential Key and Differential Power Analysis, abbreviated DKDPA, even when the standard DPA attack fails. We will now describe the general principle of this attack.

Let us assume that the attacker has in his possession a small number of computer systems, for each of which he knows the secret key of the cryptographic algorithm it uses.
20 For each computer system, even though he already knows the secret key, he applies the DPA attack exactly as though he did not know the secret key. Using the principle described above, he forms a hypotheses on 6 bits of the key, and for each choice of these 6 bits, he obtains 64 curves representing differences from the average consumption curves.

For certain implementations of the algorithm, it is possible for the DPA to reveal
25 unusual phenomena for certain choices of these 6 key bits (i.e., unusual peaks or dips for one of the 64 curves). Of course, this particular choice of 6 key bits does not correspond to the true key, but the "exclusive-OR" between these 6 bits (lets call them the K') and the 6 corresponding bits of the true key (let's call them the K) is often found to be a constant C , which means that there is always $K \oplus K' = C$ for each computer system for which the attacker
30 knows the secret key.

If this is actually the case, then the attacker can easily find the bits of a real unknown key: he applies the standard DPA attack, then notes the particular choices K' of the 6 bits that yield an unusual curve, and finally deduces K from it by calculating $K \oplus K' = C$, where C has been obtained previously.

5 One of the objects of the invention is to eliminate this vulnerability of computer systems to DKDPA attacks.

A more precise examination shows that the attacks of the DKDPA type described above are made possible by the fact that the implementation of the cryptographic calculation process used by the computer system or systems is always the same, no matter what the
10 electronic element involved and no matter what the secret key used by the cryptographic process.

The object of the method that is the subject of the present invention is to eliminate the risk of DKDPA attacks on data processing or computer systems using a secret key cryptographic process.

15 The method for protecting one or more computer systems using a secret key cryptographic calculation process, which is the subject of the present invention, is remarkable in that the implementation of the secret key cryptographic calculation process is dependent on secret data.

20 According to another characteristic, for each computer system and for each secret key, the way in which said secret data is used to perform said cryptographic calculation is public.

According to another characteristic, there are at least two pieces of secret data used by said computer systems.

According to another characteristic, each of the computer systems contains at least one specific piece of secret data.

25 Consequently, another subject of the present invention is a way of performing the cryptographic calculation that can easily be made different from one computer system to another, or for the same computer system, from the utilization of one secret key to another.

This object is achieved through the fact that in each of the computer systems, there are at least two pieces of secret data, corresponding to the various secret keys used by this
30 computer system.

According to another characteristic, in each of the computer systems, each secret key used by said cryptographic calculation corresponds to a specific piece of secret data.

According to another characteristic, the method, which uses a cryptographic calculation process using nonlinear transformations of km bits into kn bits described by k conversion tables of km bits into n bits in which n output bits of the transformation are read at an address that is a function of the km input bits, is characterized in that for each of these
5 nonlinear transformations, said k tables are part of the secret data.

According to another characteristic, the method for protecting one or more computer systems uses a cryptographic calculation process using nonlinear transformations of km bits into kn bits described by k conversion tables of km bits into n bits in which n output bits of the transformation are read at an address obtained by applying a secret bijective function to
10 an m -bit value, itself obtained by applying a public function of the km input bits of the nonlinear transformation, characterized in that for each of these nonlinear transformations, the k tables are part of the secret data.

According to another characteristic, for each of the nonlinear transformations, the secret bijective function is also part of the secret data.

15 According to another characteristic, the secret data is stored in the E^2 PROM memory of said microcomputer card.

According to another characteristic, a conversion table calculation program is stored in each computer system and activated by a given event in order to calculate the tables and store all or part of these tables in the secret data.

20 According to another characteristic, the given event is the exceeding of a given value by a counter.

Another object of the invention is a utilization of this method.

This object is achieved through the fact that the method is used to protect a cryptographic calculation process supported by the DES, Triple DES and RSA algorithms.

25 A final object of the invention is to define one or more computer systems that resist DPA and DKDPA attacks.

This object is achieved through the fact that the computer system that implements the protection process, comprising means for storing a modified cryptographic algorithm that adheres to the computational phases of the standard cryptographic algorithm and uses a secret
30 encryption key contained in a secret area of storage means, and means for executing this modified cryptographic algorithm, is characterized in that the computer system comprises first secret means for replacing each intermediate variable required for the computational phases of the standard algorithm with a plurality (k) of partial intermediate variables, second

means for applying a nonlinear transformation table to each of these partial intermediate variables, and third means for reconstituting the final result corresponding to the utilization of the standard encryption algorithm from results obtained on the partial variables.

According to another characteristic, the secret data of the computer system includes at least one first random variable v_1 constituting at least one secret partial variable, and the modified algorithm determines at least one other partial variable, for example v_2 , by applying a first secret function to the intermediate variable v and the secret partial variable or variables v_1 .

According to another characteristic, the modified algorithm applies the nonlinear transformations to the partial variables v_1 and v_2 by using tables, at least one of which A , formed by random selection, is stored in the secret data D_s , the other tables required for the calculations being able to be stored in the nonvolatile memory, the various computational rounds of the standard algorithm are executed, each time using the tables on the partial variables, and in the last round, the algorithm calculates the result by combining the partial variables in accordance with a second secret function.

According to another characteristic, the first secret means of the modified algorithm are constituted by a function f , linking the partial intermediate variables and each intermediate variable (v), such that the knowledge of one value of this intermediate variable never makes it possible to deduce all of the particular partial values v_i such that there exists a $(k-1)$ -tuple $(v_1, \dots, v_{i-1}, v_{i+1}, \dots, v_k)$ that satisfies the equation $f(v_1, \dots, v_i, \dots, v_k) = v$.

According to another characteristic, the second means of the modified algorithm are constituted by k partial conversion tables and among the k partial conversion tables, $k-1$ partial conversion tables contain secret random variables.

According to another characteristic, the second means of the modified algorithm comprise k conversion tables, each of these conversion tables receiving as input a value obtained by applying a secret bijective function ϕ_j to said function $f(v_1, \dots, v_k)$ of the partial intermediate variables in accordance with the relation $\phi_j \circ f(v_1, \dots, v_k), j \in [1, k]$, this application $\phi_j \circ f(v_1, \dots, v_k)$ being performed by direct evaluation of a resulting value, this resulting value, applied to the input of the conversion table, making it possible to read n output bits of the transformation at an address that is a function of these m input bits.

According to another characteristic, the second means of the modified algorithm replace each nonlinear transformation applied to an intermediate variable of the standard cryptographic calculation process, without a separation, with a partial nonlinear

transformation of km bits into kn bits applied to all of the partial intermediate variables, $(k-1)n$ of said output bits of this transformation being calculated as a polynomial function of the km input bits, and the n remaining bits of said output bits being obtained by reading a conversion table in which the n remaining bits are read at an address that is a function of the km input bits.

According to another characteristic, the operations performed by the modified algorithm in the various parts resulting from the separation of the cryptographic calculation process into several distinct calculation process parts are executed sequentially.

According to another characteristic, the operations performed in the various parts resulting from the separation of the cryptographic calculation process into several distinct calculation process parts are executed in interleaved fashion.

According to another characteristic, the operations performed in the various parts resulting from the separation of the cryptographic calculation process into several distinct calculation process parts are executed simultaneously in the event of multiprogramming.

According to another characteristic, the operations performed in the various parts resulting from the separation of the cryptographic calculation process into several distinct calculation process parts are executed simultaneously in various processors working in parallel.

According to another characteristic, the computer system includes a conversion table calculation program stored in each computer system and means for the activation by a given event of the calculation of the tables and for the storage of all or part of these tables in the secret data.

According to another characteristic, a counter stores a value that is incremented with each cryptographic calculation so as to constitute the given event for activating the calculation of the tables when a given value is exceeded.

Other characteristics and advantages of the present invention will be more clearly understood with the reading of the description given in reference to the drawings below, in which:

Fig. 1 represents a computer system in which the modified encryption algorithm is used according to the method of the invention;

Figs. 2A and 2B schematically represent the DES ("*Data Encryption Standard*") enciphering/deciphering process of the prior art;

Fig. 3 represents a general flow chart illustrating a partitioning method according to a prior invention;

Fig. 4A represents, by way of illustration, an implementation of the method of the prior art in a standard DES encryption algorithm;

5 Fig. 4B represents a flow chart of a particular implementation of a modified cryptographic calculation process such as DES_M according to a prior invention;

Fig. 4C represents a variant of implementation of a method as illustrated in Fig. 3;

Fig. 4D represents a variant of implementation of a method as illustrated in Fig. 4b;

10 Fig. 4E represents another particular implementation of a method of a prior invention, based on a secret bijective transformation, applied to a nonlinear transformation used in a modified cryptographic calculation process such as DES_M ;

Fig. 4F represents a computer system in which the standard encryption algorithm of the prior art is used.

15 The invention will be described below in connection with Fig. 1 and in comparison with the embodiment of the prior art represented in Fig. 4F.

20 A computer system can be constituted by a computer security module installed in a larger device, such as for example a server or a terminal. This computer system can be constituted by one or more integrated circuits incorporated into the larger device or even by a chip card, generally called a "smart card" when it includes a microprocessor or microcontroller connected to the larger device by a connector with or without contact. A standard encryption algorithm, such as for example DES, can be installed in the nonvolatile memory, for example a ROM (7), of the computer system (1). The microprocessor (2) of this computer system (1) executes this algorithm by reading, through the bus (4) that links it to the various memories, the instructions contained in the ROM (7) in order to perform the steps
25 of the encryption method described in connection with Figs. 2A and 2B by combining the secret encryption key (Ks) contained in a secret area (60) of a nonvolatile memory of the computer system, for example a programmable memory (6) of the E^2 PROM type, with the information E to be encrypted which is, for example, temporarily stored in a volatile memory (5), for example a RAM. The microprocessor, associated in a single integrated circuit with its
30 RAM, ROM and E^2 PROM memories, constitutes what is called a microcontroller or microcomputer. The microprocessor dialogues with the larger device through an input/output circuit (3) and no access to the declared secret area (60) of the nonvolatile memory is permitted through any circuit other than the microprocessor (2). It alone can read the key (Ks)

and use it in connection with the standard encryption method described with the aid of Figs. 2A and 2B to produce the encrypted message $Mc=DES(E,Ks)$.

The invention consists of modifying the algorithm used for the encryption in order to construct a modified algorithm (DES_M) that adheres to the same phases as the calculation process of the standard algorithm (DES). Thus, in the case of DES, the modified algorithm performs a separation of the cryptographic calculation process of the standard DES into several distinct calculation process parts executed in parallel and using partial intermediate results (called partial variables) distinct from those of the standard cryptographic calculation, and this separation is performed by using secret data (Ds) contained in the secret area (60) of the memory (6) of the computer system (1). This modified algorithm produces a result Mc by reconstituting the final value from the partial intermediate results, such that $Mc=DES_M(E,Ks,Ds)=DES(E,Ks)$, equal to the result that would have been obtained by the standard algorithm. It will be noted that the computer systems thus obtained are entirely compatible with those having a standard encryption (hereinafter called standard systems) and can therefore be used in place of standard systems in applications or places where the standard systems would risk being exposed to an attack, without any need to change those that are in secure locations.

This modified algorithm includes secret means for replacing each intermediate variable of the standard algorithm with several partial intermediate variables, and means for applying a nonlinear transformation table to each of these partial intermediate variables, and secret means for reconstituting the final result corresponding to the utilization of the standard encryption algorithm from the results obtained on the partial variables. Thus, since a hacker no longer knows the relation between the partial variables and the final result, he is no longer capable of discovering the secret encryption key (Ks) through a DPA attack.

For example, in the case of the protection method of the DES algorithm described above, the implementation of the modified cryptographic calculation process is made dependent on the data of the k conversion tables used to calculate each nonlinear transformation of km bits into kn bits. These k tables constitute the secret data (Ds). Moreover, in the case of variants 2 and 3, the implementation of the cryptographic calculation process is made dependent on the data of the secret bijective applications $\varphi_1, \varphi_2, \dots, \varphi_k$, which are also part of the secret data.

Thus, the modified algorithm uses the secret bijective function contained in the secret data (Ds) in the computational phases where this is necessary, and uses the conversion tables, also contained in the secret data, in other the computational phases.

In the case of the example of the DES algorithm described above, the way in which this secret data is used is public.

It is quite clear that the invention has been illustrated in the case of the encryption algorithm called DES, but the same principle and the same method can be used with any other known encryption method, such as triple DES or RSA.

In order to make attacks of the DKDPA type ineffective on the computer system or systems, it is also necessary to choose a piece of secret data (Ds) that is not always the same from one computer system to another or from the utilization of one secret key to another. For this reason, it is preferable to place it in a programmable memory in order to be able to change it easily from one computer system to another. In the above example of DES, it is clear that it is easy to choose a new value for the secret data from the k conversion tables used to calculate each nonlinear transformation of km bits into kn bits; it is possible, for example, to randomly choose (k-1) tables, then deduce the kth table through a simple calculation. Likewise, in the case of variants 2 and 3, it is possible to choose (k-1) tables randomly, and the secret bijective applications $\varphi_1, \varphi_2, \dots, \varphi_k$ equally randomly, then deduce the kth table from them, again through a simple calculation.

In the case where the computer systems are one or more microcomputer cards, the secret data (Ds) on which the implementation of the secret key cryptographic process depends can be stored in the E²PROM memory (6). This makes it possible to change it from one card to another in the process of customizing the card, during which one or more secret keys are generally entered in the E²PROM of said card. It is also possible to change this secret data written in the E²PROM memory when it is necessary to change one or more of the secret keys contained in the card.

In the strongest version of the invention, the secret data depends on both the microcomputer card in question and the secret key used by the cryptographic calculation process. For example, the secret data is chosen randomly each time a secret key is entered into a card. This actually amounts to entering a pair (secret key Ks, secret data Ds) into the E²PROM memory of the microcomputer card each time, instead of entering only the secret key. In a variant of embodiment of the invention, given as an illustrative but non-limiting example, the secret data includes at least one first random variable v_1 constituting at least one

secret partial variable, and the modified algorithm determines at least one other partial variable, for example v_2 , by applying a secret function to the intermediate variable v and the secret partial variable or variables v_1 . This secret function can be, for example, an exclusive-OR such as:

$$v_2 = v_1 \oplus v.$$

The modified algorithm applies the nonlinear transformations to the partial variables v_1 and v_2 by using tables, at least one of which A , formed by random selection, is stored in the secret data D_s , the other tables required for the calculations being able to be stored in the nonvolatile memory. The various computational rounds of the standard algorithm are executed, each time using the tables on the partial variables, and in the last round the algorithm calculates the result by combining the partial variables in accordance with a second secret function, which can be the inverse of the preceding one.

All of the variants described in reference to Figs. 3 through 4F are also part of the invention in that they incorporate one or more of the elements involved in the modification of the algorithm into the secret data contained in programmable nonvolatile memory (6). The elements involved in the modification of the algorithm are either the secret function f , or partial conversion tables, or a secret random conversion table A associated by a calculation with other conversion tables contained in a non-secret part of programmable (6) or non-programmable (7) memory, or a polynomial function and one or more conversion tables, or a secret bijective function ϕ and a secret random transformation A , or even a secret quadratic function.

In another variant of embodiment of the invention, the program for calculating the S-boxes or conversion tables, normally present in customized machines, can be downloaded or written during a pre-customization phase into the secret area (61) of the programmable nonvolatile E^2 PROM memory (6) and activated during a customization phase by an order from the outside, executable only once during the customization phase. Once the order is executed, the calculation program either sets a lock in nonvolatile memory that denies access to this program unless a specific key is presented, or in another embodiment, triggers the automatic erasure of this secret area (61). This variant makes it possible to implement the invention even with unmodified customized machines. The calculation of the S-boxes or conversion tables is performed by adhering to the principles mentioned above and by using, as a diversifier, a piece of information specific to the card in the process of being customized, such as the serial number of the card that was recorded in the pre-customization phase, the

values obtained by this calculation being written into the secret data (60) of the secret area of the nonvolatile memory (6).

In another additional variant, the card includes an additional counter (62) in nonvolatile memory, which is incremented by the DES_M algorithm with each execution of a DES calculation by the latter. The operating system of the card is capable of comparing the content of this counter to a given value n with each power-up of the card and to call the calculation program (61) in order to calculate new S-boxes or conversion tables in the event that the value n is exceeded. The operating system of the card or the calculation program handles the storage of the S-boxes in the secret data in accordance with a procedure defined by the calculation program (61) or the operating system and resets the counter. In addition, in this variant the DES_M algorithm, prior to performing a DES calculation, verifies that the additional counter (62) has not exceeded the given value increased by a constant $(n+c)$, in which c is a defined constant. If it has been exceeded, the algorithm assumes an attempted fraud and resets the card to zero.

Finally, it is clear that in all the embodiments described, the way in which the cryptographic calculation is performed depends on the modification of the DES_M algorithm, which itself depends on the elements contained in the secret storage area.

Any combination of the different variants presented is also part of the invention.

CLAIMS

1 1. Method for protecting one or more computer systems using the same secret key
2 (Ks) cryptographic algorithm, characterized in that the way in which said calculation is
3 performed depends, for each computer system and for each secret key, on secret data (Ds)
4 stored in a secret area of the computer system or systems.

1 2. Protection method according to claim 1, characterized in that, for each computer
2 system and for each secret key (Ks), the way in which said secret data (Ds) is used to perform
3 said cryptographic calculation is public.

1 3. Protection method according to claim 1, characterized in that there are at least
2 two pieces of said secret data (Ds) used by said computer systems.

1 4. Protection method according to claim 3, characterized in that each of the
2 computer systems contains at least one specific piece of said secret data (Ds).

1 5. Protection method according to claim 1, characterized in that in each of the
2 computer systems, there are at least two pieces of said secret data (Ds), corresponding to the
3 various secret keys used by this computer system.

1 6. Protection method according to claim 5, characterized in that in each of the
2 computer systems, each secret key (Ks) used by said cryptographic calculation corresponds to
3 a specific piece of said secret data (Ds).

1 7. Method according to claim 1 for protecting one or more computer systems using
2 a cryptographic calculation process using nonlinear transformations of k_m bits into k_n bits
3 described by k conversion tables in which n output bits of the transformation are read at an
4 address that is a function of the k_m input bits, characterized in that for each of these nonlinear
5 transformations, said k tables are part of the secret data (Ds).

1 8. Method according to claim 1 for protecting one or more computer systems using
2 a cryptographic calculation process using nonlinear transformations of k_m bits into k_n bits

described by k conversion tables in which n output bits of the transformation are read at an address obtained by applying a secret bijective function (ϕ) to an m-bit value, itself obtained by applying a public function of the km input bits of the nonlinear transformation, characterized in that for each of these nonlinear transformations, said k tables are part of the secret data (Ds).

9. Protection method according to claim 8, characterized in that for each of the nonlinear transformations, the secret bijective function (ϕ) is also part of the secret data (Ds).

10. Method according to claim 1 for protecting one or more microcomputer cards, characterized in that the secret data is stored in the E²PROM memory of said microcomputer card.

11. Protection method according to claim 1, characterized in that a conversion table calculation program is stored in each computer system and activated by a given event in order to calculate the tables and store all or part of these tables in the secret data.

12. Protection method according to claim 11, characterized in that the given event is the exceeding of a given value by a counter.

13. Utilization of the method according to claim 1 to protect a cryptographic calculation process supported by the DES, Triple DES and RSA algorithms.

14. Computer system comprising means for storing a modified cryptographic algorithm that adheres to the computational phases of the standard cryptographic algorithm and uses a secret encryption key contained in a secret area of storage means, and means for executing this modified cryptographic algorithm, characterized in that the computer system comprises first secret means for replacing each intermediate variable required for the computational phases of the standard algorithm with a plurality (k) of partial intermediate variables, second means for applying a nonlinear transformation table to each of these partial intermediate variables, and third secret means for reconstituting the final result corresponding to the utilization of the standard cryptographic algorithm from results obtained on the partial variables.

1 15. Computer system according to claim 14, characterized in that secret data stored in
2 the secret area includes at least one first random variable v_1 constituting at least one secret
3 partial variable, and the modified algorithm determines at least one other partial variable, for
4 example v_2 , by applying a first secret function to the intermediate variable v and the secret
5 partial variable or variables v_1 .

1 16. Computer system according to claim 15, characterized in that the modified
2 algorithm includes means for applying the nonlinear transformations to the partial variables
3 v_1 and v_2 by using tables, at least one of which A , formed by random selection, is stored in
4 the secret data D_s , the other tables required for the calculations being stored in a nonvolatile
5 memory, means for executing the various computational rounds of the standard algorithm,
6 each time using the tables on the partial variables, and means for calculating the result in the
7 last round of the algorithm by combining the partial variables in accordance with a second
8 secret function.

1 17. Computer system according to claim 14, characterized in that the first secret
2 means of the modified algorithm are constituted by a function f , linking the partial
3 intermediate variables and each intermediate variable (v), such that the knowledge of one
4 value of this intermediate variable never makes it possible to deduce all of the particular
5 partial values v_i such that there exists a $(k-1)$ -tuple $(v_1, \dots, v_{i-1}, v_{i+1}, \dots, v_k)$ that satisfies the
6 equation $f(v_1, \dots, v_i, \dots, v_k) = v$.

1 18. Computer system according to claim 14, characterized in that the second
2 means of the modified algorithm are constituted by k partial conversion tables, and among
3 the k partial conversion tables, $k-1$ partial conversion tables contain secret random variables.

1 19. Computer system according to claim 18, characterized in that the second
2 means of the modified algorithm comprise k conversion tables, each of these conversion
3 tables receiving as input a value obtained by applying a secret bijective function ϕ_1 to said
4 function $f(v_1, \dots, v_k)$ of the partial intermediate variables in accordance with the relation $\phi_j \circ$
5 $f(v_1, \dots, v_k)$, $j \in [1, k]$, this application $\phi_j \circ f(v_1, \dots, v_k)$ being performed by direct evaluation
6 of a resulting value, this resulting value, applied to the input of the conversion table, making

7 it possible to read n output bits of the transformation at an address that is a function of these
8 m input bits.

1 20. Computer system according to claim 14, characterized in that the second
2 means of the modified algorithm comprise means for replacing each nonlinear transformation
3 applied to an intermediate variable of the standard cryptographic calculation process, without
4 a separation, with a partial nonlinear transformation of km bits into kn bits applied to all of
5 the partial intermediate variables, means for calculating $(k-n)$ of said output bits of this
6 transformation as a polynomial function of the km input bits, and means for reading the
7 remaining n bits of said output bits by reading a conversion table in which the n remaining
8 bits are read at an address that is a function of the km input bits.

1 21. Computer system according to claim 14, characterized in that it includes
2 means for sequentially executing the operations performed by the modified algorithm in the
3 various parts resulting from the separation of the cryptographic calculation process into
4 several distinct calculation process parts.

1 22. Computer system according to claim 14, characterized in that it includes means
2 for executing, in interleaved fashion, the operations performed in the various parts resulting
3 from the separation of the cryptographic calculation process into several distinct calculation
4 process parts.

1 23. Computer system according to claim 14, characterized in that it includes means
2 for simultaneously executing the operations performed in the various parts resulting from the
3 separation of the cryptographic calculation process into several distinct calculation process
4 parts, in the event of multiprogramming.

1 24. Computer system according to claim 14, characterized in that it includes means
2 for simultaneously executing, in different processors working in parallel, the operations
3 performed in the various parts resulting from the separation of the cryptographic calculation
4 process into several distinct calculation process parts.

1 25. Computer system according to claim 14, characterized in that it includes a
2 conversion table calculation program stored in each computer system and means for the
3 activation by a given event of the calculation of the tables and for the storage of all or part of
4 these tables in the secret data.

1 26. Computer system according to claim 14, characterized in that a counter includes
2 means for storing a value that is incremented with each cryptographic calculation so as to
3 constitute the given event for the activation, by activating means, of the calculation of the
4 tables when a given value is exceeded.

ABSTRACT

The invention relates to a method for protecting one or more computer systems using the same secret key (Ks) cryptographic algorithm, characterized in that the way in which said calculation is performed depends, for each computer system and for each secret key, on secret data (Ds) stored in a secret area of the computer system or systems.

Fig. 1.

Fig. 1.

FIG 1


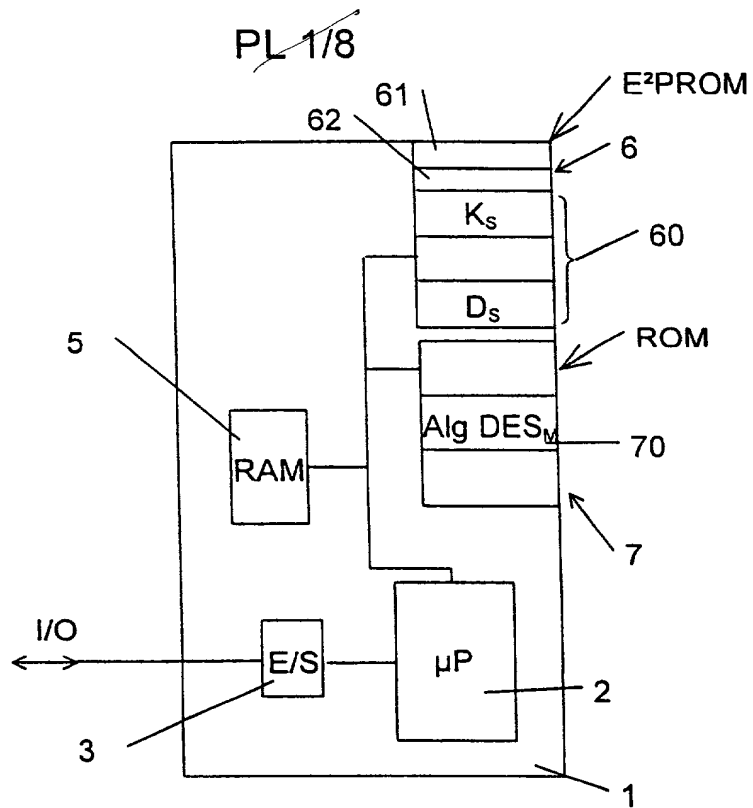


FIG 4F

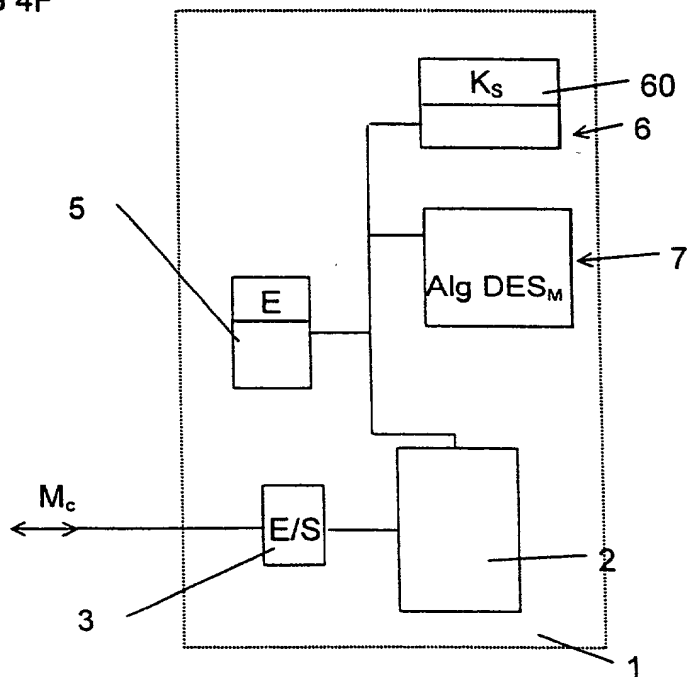

09/719195

PL 2/8

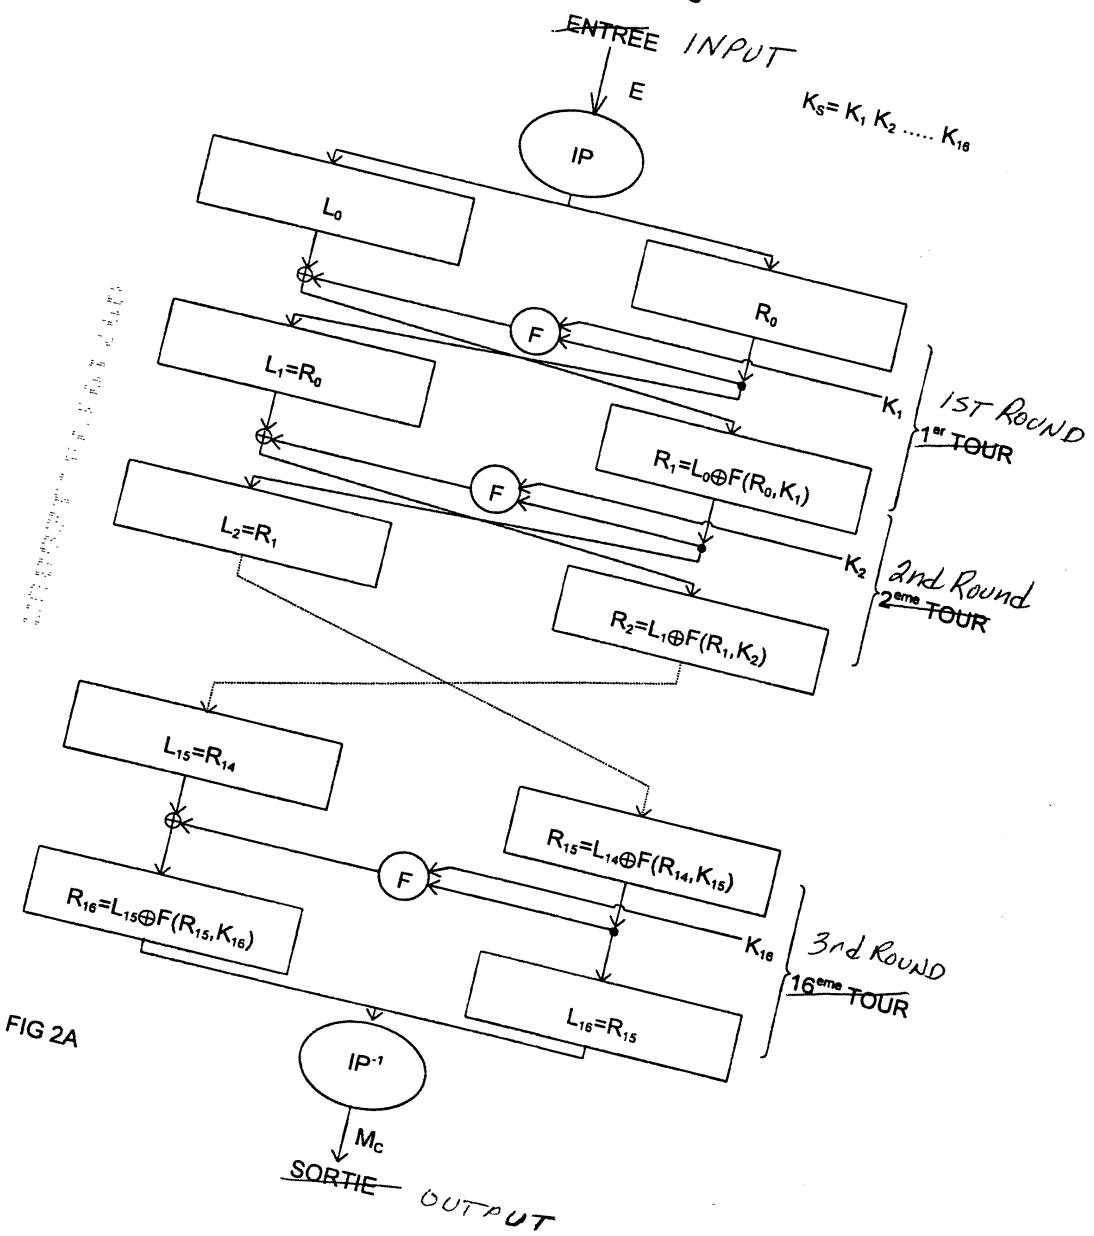


FIG 2A


09/719193

Calcul de $F(R_{i-1}, k_i)$

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	---	---	---	---	---	---	---	---	---	---

R_{i-1}

Permutation + Expansion E

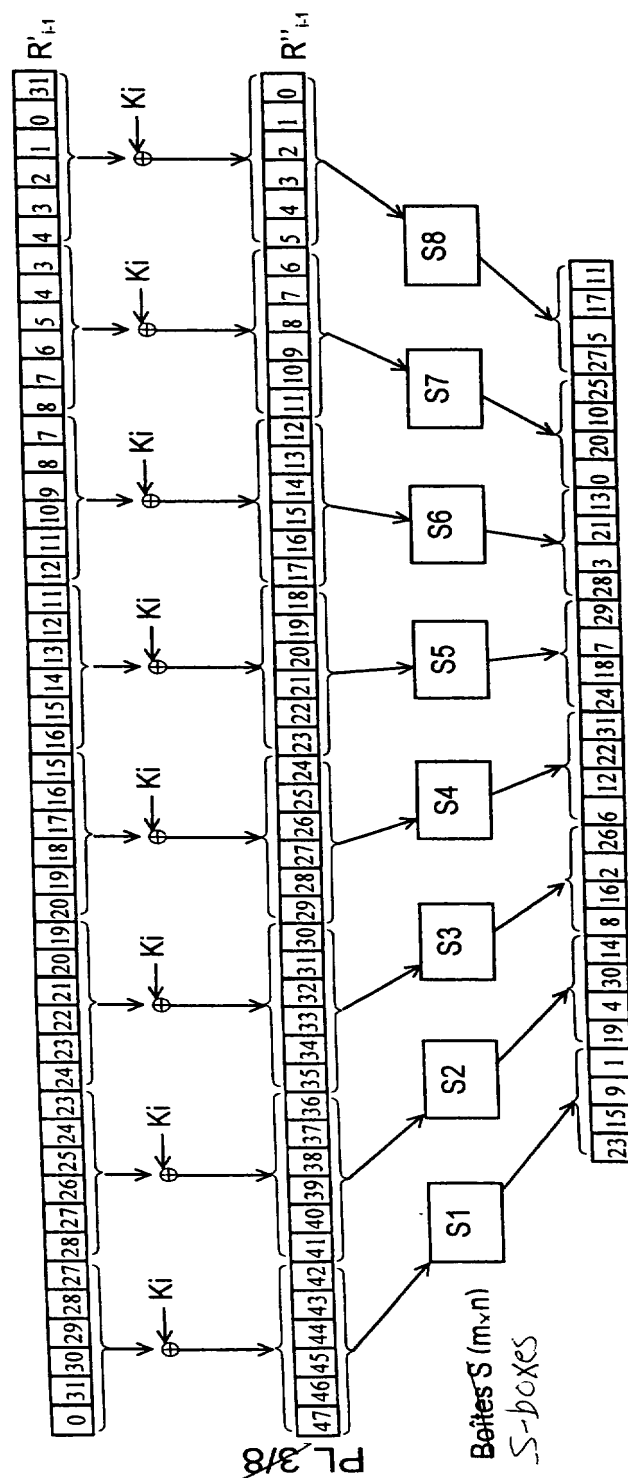

Permutation P

31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	---	---	---	---	---	---	---	---	---	---

$F(R_{i-1}, k_i)$

PL 4/8

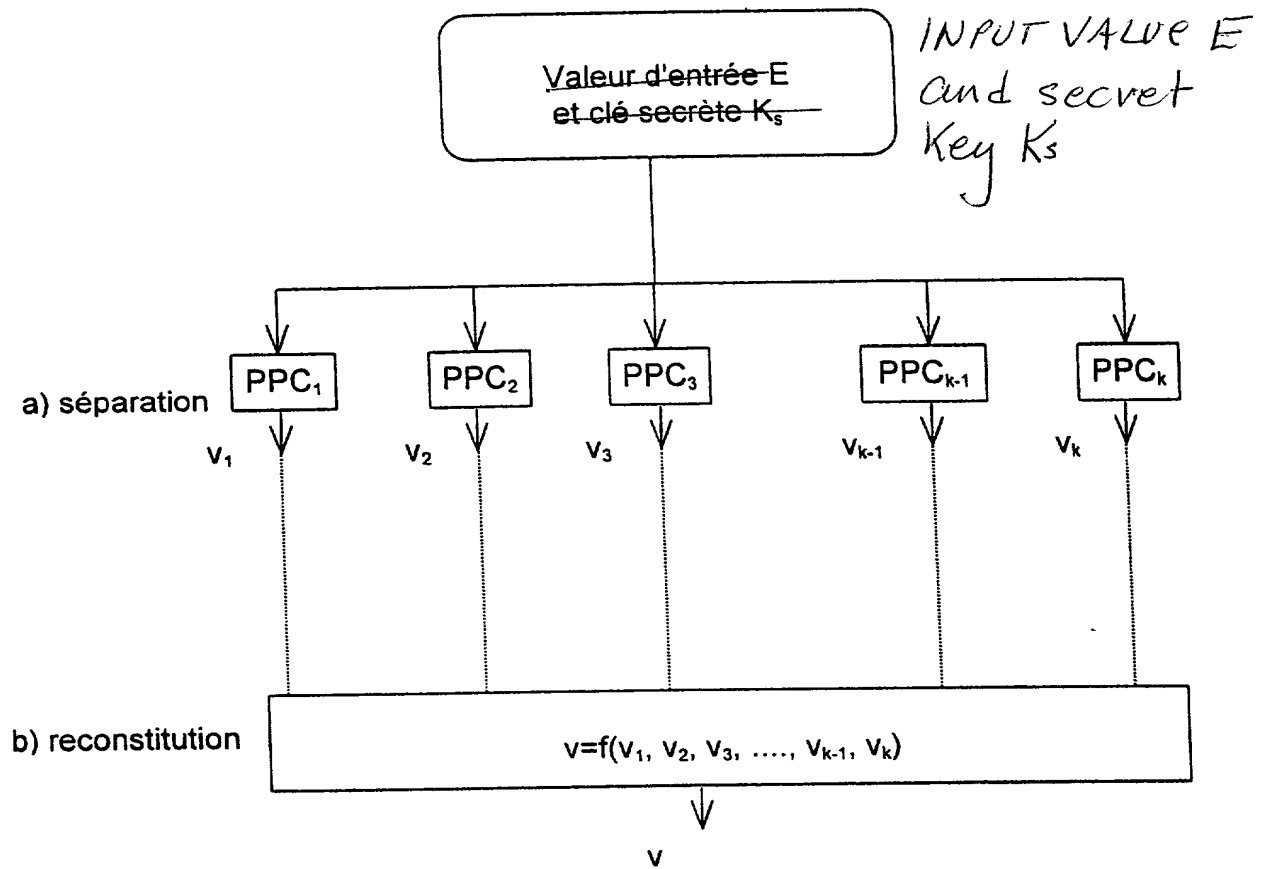


FIG 3

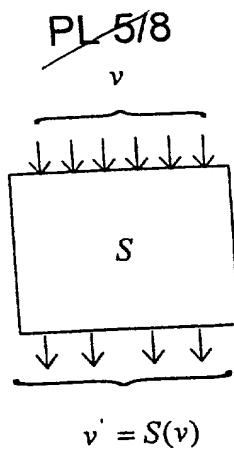


FIG 4A

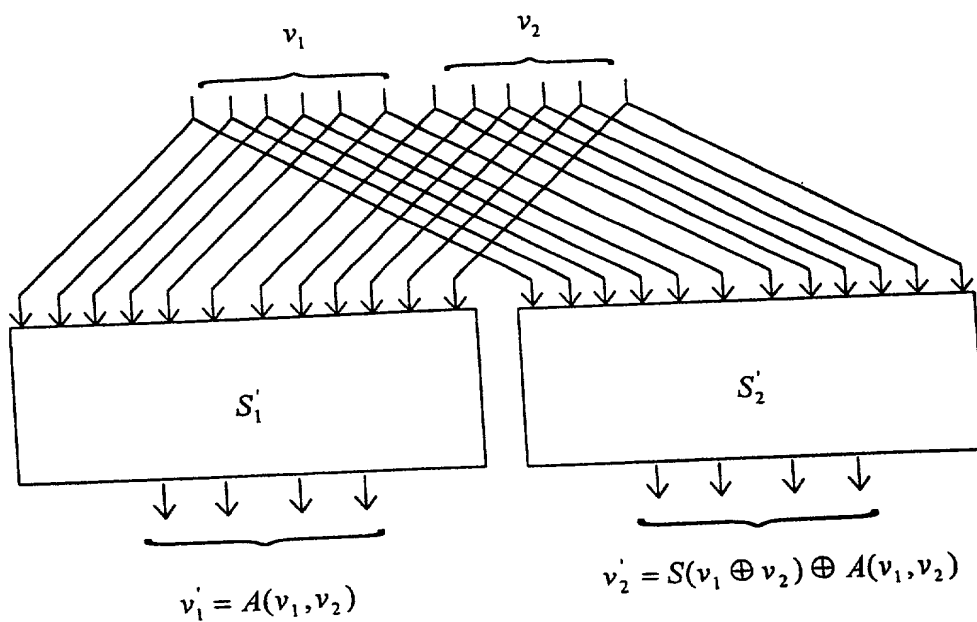


FIG 4B

PL 6/8

E

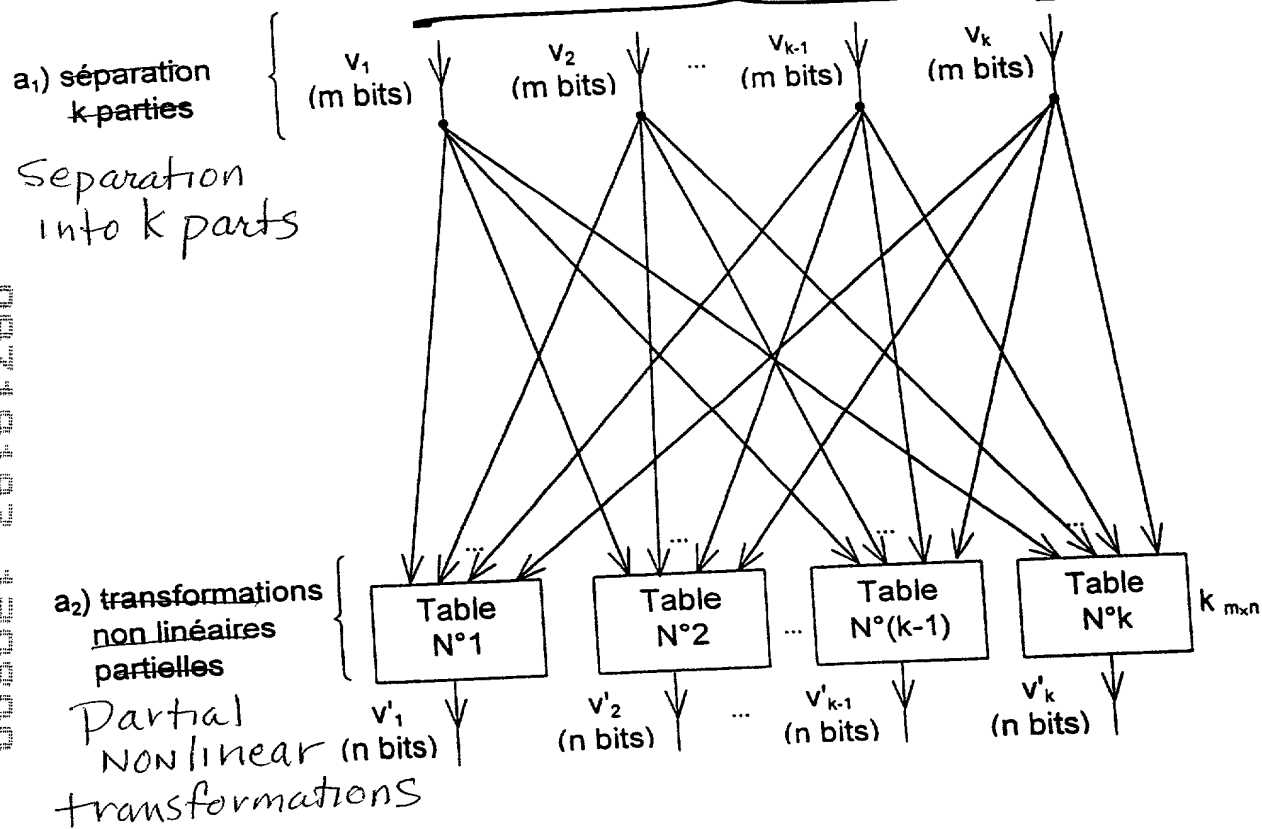


FIG 4C

PL 7/8


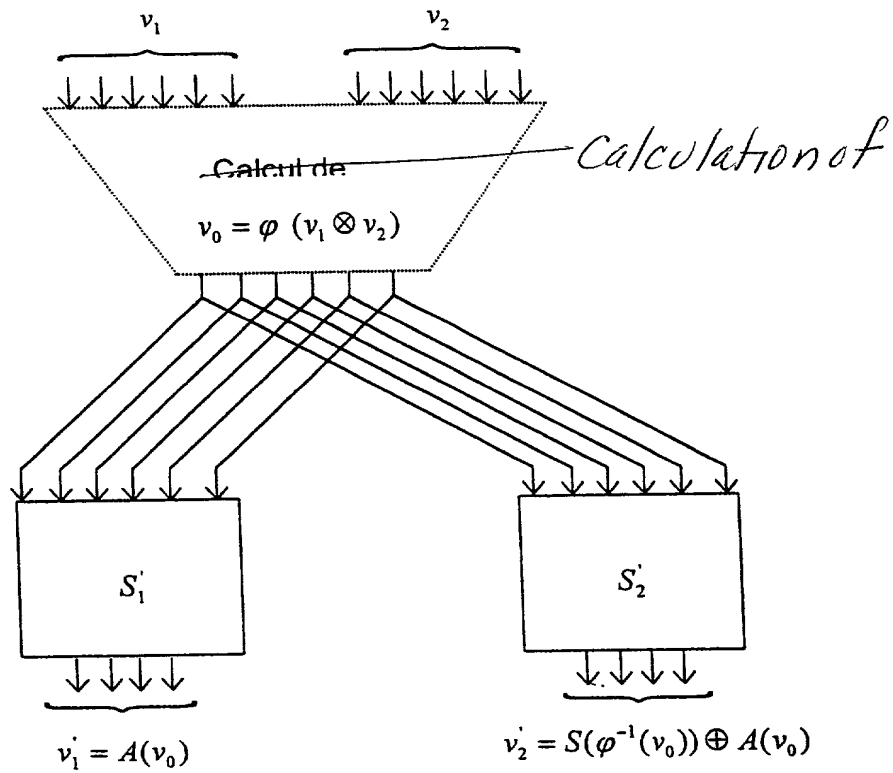


FIG 4D

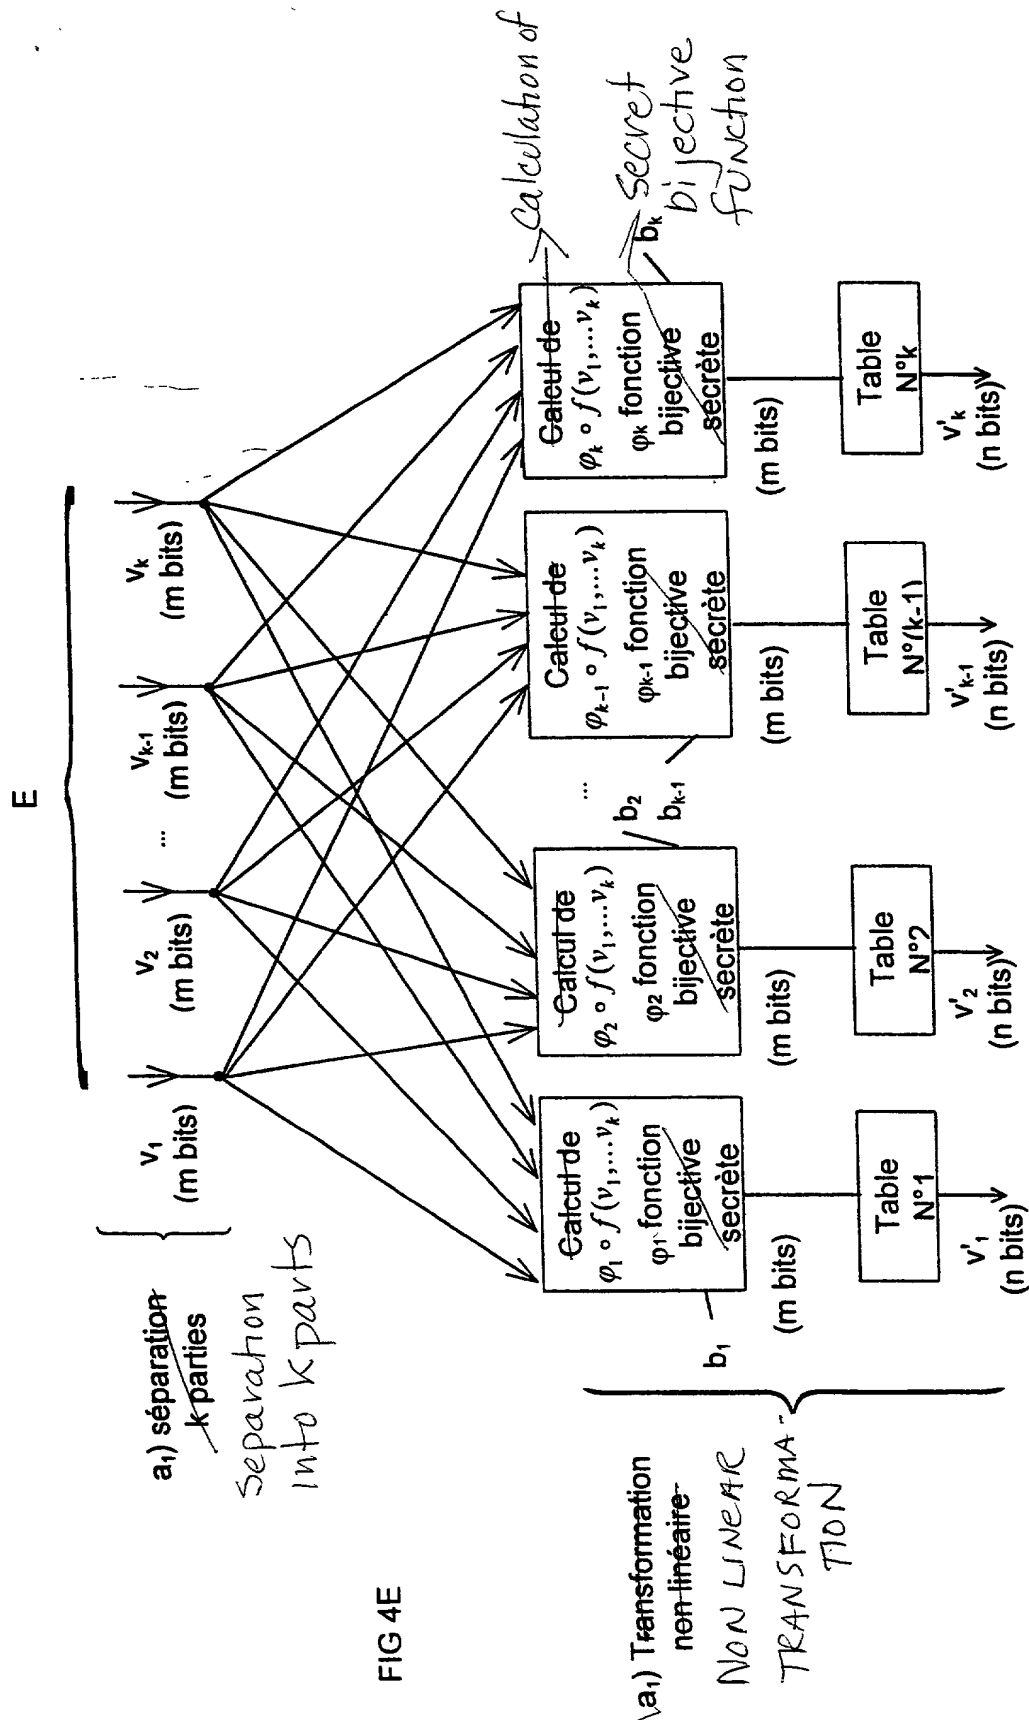

Declaration and Power of Attorney For Patent Application

Declaration Pour Demandes de Brevets Avec Pouvoirs

French Language Declaration

En tant qu' inventeur nommé ci-après, Je déclare par le présent acte que:

Mon nom, mon domicile, mon adresse postale, ma nationalité sont ceux qui figurent ci-après,

Je déclare que je crois être l'inventeur original, premier et unique (si un seul nom figure sur le présent acte) ou un des co-inventeurs, originaux et premiers (si plusieurs noms figurent sur le présent acte) du sujet revendiqué et pour lequel un brevet est demandé sur la base de l'invention intitulée:

Procédé de sécurisation d'un ou plusieurs ensembles électroniques mettant en œuvre un même algorithme cryptographique avec clé secrète, une utilisation du procédé et l'ensemble électronique.

dont la description
(cocher la case correspondante)

☒ est annexée au présent acte.

☐ a été déposée _____

Numéro de série de la demande _____

et modifiée le _____
(si approprié)

Je déclare par le présent acte avoir examiné et compris le contenu de la description identifiée ci-dessus, revendications y compris, et le cas échéant telle que modifiée par l'amendement cité plus haut.

Je reconnais le devoir de divulguer l'information qui est en rapport avec l'examen de cette demande selon Titre 37 du Code des Règlements Fédéraux §1.56(a).

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

the specification of which
(check one)

☐ is attached hereto.

☐ was filed on _____ as

Application Serial No. _____

and was amended on _____
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

French Language Declaration

Je revendique par le présent acte le bénéfice de priorité étrangère selon Titre 35, du Code des Etats-Unis, §119 de toute demande de brevet ou d'attestation d'inventeur énumérée ci-après, et j'ai identifié également ci-après toute demande étrangère de brevet ou d'attestation d'inventeur ayant une date de dépôt antérieure à celle de la demande pour laquelle la priorité est revendiquée.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior foreign applications

Demande(s) de brevet antérieure(s) dans un autre pays:

FR 99 04441

France

09 04 1999

(Number)
(Numéro)

(Country)
(Pays)

(Day/Month/Year Filed)
(Jour/Mois/Année de dépôt)

Priority claimed

Droit de priorité
revendiqué

☒
Yes
Oui

☐
No
Non

(Number)
(Numéro)

(Country)
(Pays)

(Day/Month/Year Filed)
(Jour/Mois/Année de dépôt)

☐
Yes
Oui

☐
No
Non

(Number)
(Numéro)

(Country)
(Pays)

(Day/Month/Year Filed)
(Jour/Mois/Année de dépôt)

☐
Yes
Oui

☐
No
Non

Je revendique par le présent acte, le bénéfice selon Titre 35 du Code des Etats-Unis, §120 de toute(s) demande(s) américaines énumérée(s) ci-après et, dans la mesure où le sujet de chacune des revendications de cette demande n'est pas divulgué dans la demande américaine antérieure, de la façon définie par le premier paragraphe de Titre 35 du Code des Etats-Unis, §112, je reconnais le devoir de divulguer l'information pertinente selon Titre 37 du Code des Règlements Fédéraux, §1.56(a), toute information qui se présente entre la date de dépôt de la demande antérieure et la date de dépôt de la demande, soit nationale, soit internationale PCT.

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

PCT/FR 00 100902

(Application Serial No.)
(No. de Demande)

07/04/2000

(Filing Date)
(Date de Dépôt)

Pending

(Etat)
(brevetée, pendante,
abandonnée)

(Status)
(patented, pending,
abandoned)

(Application Serial No.)
(No. de Demande)

(Filing Date)
(Date de Dépôt)

(Etat)
(brevetée, pendante,
abandonnée)

(Status)
(patented, pending,
abandoned)

Je déclare par le présent acte que toutes mes déclarations, à ma connaissance, sont vraies et que toutes les déclarations faites à partir de renseignements ou de suppositions, sont tenues pour être vraies; de plus, toutes ces déclarations ont été faites en sachant que de fausses déclarations volontaires u autres actes de même nature sont sanctionnées par une amende ou un emprisonnement, ou les deux, selon la Section 1001, du Titre 18 de Code des Etats-Unis et que de telles déclarations délibérément fausses peuvent compromettre la validité de la demande ou du brevet délivré.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

French Language Declaration

POUVOIR: En tant qu'inventeur, je désigne l'(les) avocat(s) et/ou l'(les) agent(s) suivant(s) pour poursuivre la procédure de cette demande et traiter toute affaire la concernant supris du Bureau des Brevets et de Marques:

Harold L. Stowell, Reg. 17,233
 Edward J. Kondracki, Reg. 20,604
 Dennis P. Clarke, Reg. 22,549
 William L. Feeney, Reg. 29,918
 John C. Kerins, Reg. 32,421

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

Harold L. Stowell, Reg. 17,233
 Edward J. Kondracki, Reg. 20,604
 Dennis P. Clarke, Reg. 22,549
 William L. Feeney, Reg. 29,918
 John C. Kerins, Reg. 32,421

Adresser toute correspondance à:

Edward J. Kondracki, Esq.
 KERMAM, STOWELL, KONDRACKI
 & CLARKE, P.C.
 5203 Leesburg Pike, Suite 600
 Falls Church, VA 22041

Send Correspondence to:



Edward J. Kondracki, Esq.
 KERMAM, STOWELL, KONDRACKI
 & CLARKE, P.C.
 5203 Leesburg Pike, Suite 600
 Falls Church, VA 22041

Adresser toute communication téléphonique à:
 (Nom) (Numéro de téléphone)

Edward J. Kondracki, Esq.
 (703) 998-3302

Direct Telephone Calls to: (name and telephone number)

Edward J. Kondracki, Esq.
 (703) 998-3302

Nom complet du seul ou premier inventeur		Full name of sole or first inventor	
GOUBIN Louis			
Signature de l'inventeur	Date	Inventor's signature	Date
	28 mai 1999		
Domicile		Residence	
3 rue Brown-Séguard 75015 PARIS FRANCE FRX			
Nationalité		Citizenship	
Française			
Adresse Postale		Post Office Address	
3 rue Brown-Séguard 75015 PARIS FRANCE			
Nom complet du second co-inventeur, le cas échéant		Full name of second joint inventor, if any	
PATARIN Jacques			
Signature de l'inventeur	Date	Second Inventor's signature	Date
	28 mai 1999		
Domicile		Residence	
11, rue Amédée Dailly 78220 VIROFLAY FRANCE FRX			
Nationalité		Citizenship	
Française			
Adresse Postale		Post Office Address	
11, rue Amédée Dailly 78220 VIROFLAY FRANCE			

(Fournir les mêmes renseignements et la signature de tout co-inventeur supplémentaire.)

(Supply similar information and signature for third and subsequent joint inventors.)

T2146-906738-US 3826/BC(PCT)

IN THE UNITED STATES DESIGNATED/ELECTED OFFICE (D.O./E.O./US)

Applicant: Louis GOUBIN et al.

International
Application No.: PCT/FR00/00902

International
Filing Date: 7 April 2000

U.S. Serial No.: To be Assigned

U.S. Filing Date: December 8, 2000

For: **METHOD FOR MAKING SECURE ONE OR SEVERAL
COMPUTER INSTALLATIONS USING A COMMON
CRYPTOGRAPHIC SECRET KEY ALGORITHM, USE OF
THE METHOD AND COMPUTER INSTALLATION**

McLean, Virginia

CHANGE OF ADDRESS

Honorable Commissioner of Patents
and Trademarks
Washington, D.C. 20231

Sir:

Effective immediately, please note our new correspondence address and
telephone/fax numbers as follows:

Miles & Stockbridge P.C.
1751 Pinnacle Drive
Suite 500
McLean, VA 22102-3833
Telephone: 703-903-9000
Fax: 703-610-8686


T2146-906738-US 3826/BC(PCT)

Respectfully submitted,

MILES & STOCKBRIDGE P.C.

Date: December 8, 2000

By:



Edward J. Kondracki
Registration No. 20,604

1751 Pinnacle Drive – Suite 500
McLean, VA 22102-3833
Tel.: 703/903-9000
Fax: 703/610-8686